



GigE^{PRO}

Onboard processing power.

GIGABIT ETHERNET CMOS CAMERAS FOR INDUSTRIAL VISION

neto
NEW ELECTRONIC TECHNOLOGY

GigEPRO – ONBOARD IMAGE PROCESSING

GigEPRO – re-defining “efficient image processing”.

GigEPRO - GigE/CMOS SERIES


NET's GigEPRO cameras feature advanced real-time image processing functionality and full GigE Vision standard, GenIcam and GenTL compliancy to serve most different industrial applications. With GigEPRO cameras customers can choose from already available NET image processing functions, apply own image processing functions or even decide for a combination of all in order to achieve efficiency improvements in image processing. GigEPRO delivers great benefit to industrial applications by adding image processing functionalities

to a solid and compact digital camera. The cameras can realize performance improvements in any industrial application which uses the GigE Vision standard. The NET image pre-processing library offers a set of image processing functions fully described in the GenIcam compliant XML standard. Additional specific image processing tasks for custom applications are available on request. The industrial camera is also offered as “open camera” allowing the customer to add image processing functionalities to the camera by himself.

When applying high performance and cost effective microelectronics there is great potential to balance image processing tasks between the camera and the host PC in a more efficient way. The camera is able to take over image processing steps, like pre-processing and extraction, from the host PC and set free or minimize additional processing demand. This applies especially in operations running on full sensor size.

Efficient partitioning of image processing tasks between camera and PC: GigEPRO takes over pre-processing and extraction steps from the host PC


sensor processing >>> customer specific processing >>> GigE transmission up to 100m >>> pre-processing >>> extraction >>> interpretation >>> decision

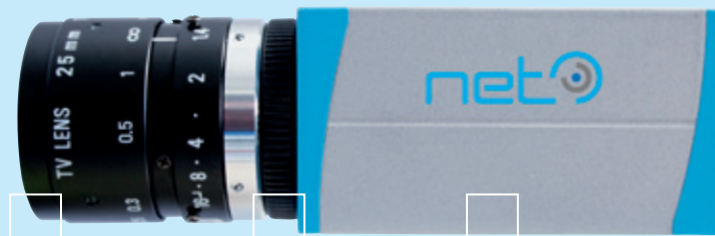

NET offers a wide range of lenses: high resolution, telecentric, CCTV and more


C-/CS-lens mount

compact and robust aluminum housing: 30 x 30 x 56 mm (picture: 1:1 scale)



ethernet RJ45 connector, Power over Ethernet (PoE)

8 pin connector: digital I/O, power



host PC application

TECHNICAL DATA - GigE/CMOS CAMERAS

PRODUCT OVERVIEW

GigEPRO cameras are equipped with color, mono-chrome and high quantum efficiency (NIR) CMOS image sensors with resolutions from 0.36 to 10 megapixel. These sensors allow high speed frame rates at full resolution. Its sensors comprise global shutter for fast moving objects and rolling shutter,

also with global reset image readout, to capture images with outstanding signal quality. As sophisticated image analysis functions, and overall or global image processing functions become quite complex and might be impossible to perform on a host PC at reasonable cost, the camera is offered

with different FPGA options. GigEPRO customers are free to decide on the optimal software and hardware configuration which really improves their specific application goal. Thus, there are virtually no limits to the advanced image processing capabilities of GigEPRO.

MONOCHROME/COLOR	GP1041M	GP1041C	GP4136M	GP4136C	GP4136IR	GP4206M	GP4206C	GP1305C	GP1503M	GP1503C	GP11004M	GP11004C
Resolution (H x V) [px]	752 x 480 / WVGA		1280 x 1024 / SXGA			1600 x 1200 / UXGA		2048 x 1536 / QXGA	2592 x 1944 / QSXGA		3840 x 2748 / WQUXGA	
Sensor	CMOS		CMOS			CMOS		CMOS	CMOS		CMOS	
Image sensor	MT9V032		EV76C560		EV76C661	EV76C570		MT9T001	MT9P031	MT9P001	MT9J003	
Sensor size	1/3"		1/1.8"			1/1.8"		1/2"	1/2.5"		1/2.3"	
Pixel size [µm]	6.00 x 6.00		5.30 x 5.30			4.50 x 4.50		3.20 x 3.20	2.20 x 2.20		1.67 x 1.67	
Frame rate [fps]	86		60			50		12	15		7.5	
Shutter	global		global; rolling; global reset			global; rolling; global reset		rolling with global reset				
Shutter speed	24 µs - 763 ms	62 µs - 745 ms	31 µs - 1030 ms			31 µs - 1030 ms		56 µs - 50 s	85 µs - 89 s	74 µs - 77 s	146 µs - 135 s	
Dynamic range [dB]	55		62		63	62	61	70		65		
Binning	2 x 2 / 4 x 4		2 x 2			2 x 2		2 x 2 / 4 x 4	2 x 2 / 4 x 4		2 x 2 / 4 x 4	
Skipping	-		640 x 512 / 320 x 256 multiple ROIs / user-defined			640 x 512 / 320 x 256 multiple ROIs / user-def.		1024 x 768 / 512 x 384	1280 x 960 / 640 x 448		1920 x 1344 / 960 x 640	
Aspect ratio	14:9		5:4			4:3		4:3	4:3		4:3	
Gain [dB]	12		24			24		18	18		18	
Lens	C- / CS-mount											
Scanning system	progressive scan											
Trigger	external, software, timer based, counter based											
Strobe	sensor, trigger, software, timer based, counter based											
Interface	Gigabit Ethernet according to GigE vision standard / 1Gbps											
Dimension (WxHxD) [mm]	30 x 30 x 56											
Power consumption [W]	2.5 to 4 (depends on hardware option)											
Operating temperature	0 to +45°C											
Power supply	PoE or 9 - 24VDC on AUX connector											
Cable connector	8 pin (power supply 9-24 V + digital I / O)											
Digital input / output	opto decoupled (5 to 24 V) single input (hardware trigger), dual output (hardware strobe)											

APPLICATION & SOFTWARE

Ask us for a matching vision solution!

APPLICATION OVERVIEW

NET's GigEPRO cameras target a wide application range in industrial vision. The camera design qualifies i.a. for alignment control, surface- and printing inspection, edge and contour analysis, bar code and data matrix, access control, security encryption, traffic control and many others.

IMAGE PROCESSING FUNCTIONS

The NET image pre-processing library offers a set of image processing functions to GigEPRO. All library functions are described in the GenlCam compliant XML standard camera description file:

- high end de-mosaicing/de-bayering
- full color matrix and color correction
- geometric correction
- gain offset correction
- flatfield correction
- temporal noise reduction (TNR)
- 1D and 2D image filtering

Many image processing tasks can't be carried out with a single generic function covering all customer needs. Therefore NET offers specific

image processing tasks on request, amongst others the following typical classes of image processing tasks:

- image segmentation: thresholding, boundary based, region based, template matching, texture based, color based
- binarization: global/local linear or adaptive threshold, edge level
- laser 3D algorithms: threshold, maximum and COG
- barcode & 2D matrix detection
- image compression: JPEG and RL (Run Length)


CAMERA CUSTOMIZATION

GigEPRO features the concept of an "open camera". This allows experienced customers and system integrators to customize the camera with proprietary in-house algorithms and the development of products targeted for niche machine vision applications. The development and test of customer algorithms takes place on a development platform, which NET supplies together with a development toolkit to program embedded core within cameras.

SOFTWARE DEVELOPMENT KIT (SDK) & 3RD PARTY SOFTWARE

SynView, the included SDK, is compliant with GigE Vision, GenTL and Genlcam (with XML files) standards and runs under Win XP/7 and Linux. It supports the programming languages C, C++, .NET environment and enables quick integration into existing customer systems. The setting and evaluation of image data is achieved by means of various functionalities for camera calibration, preview, image evaluation and code examples. NET supports all GenTL consumer image processing libraries, i.a. Adaptive Vision Studio, Halcon, VisionPro, LabView Vision, and MATLAB.

SynView – quick image setting and evaluation

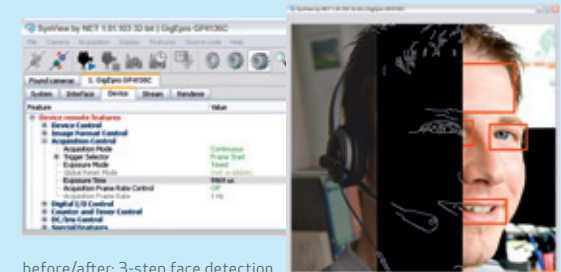

before/after: 3-step face detection

NET New Electronic Technology GmbH

Lerchenberg 7
86923 Finning, Germany
Tel: +49 8806 9234 0
Fax: +49 8806 9234 77
info@net-gmbh.com
www.net-gmbh.com

NET Italia S.r.l.

Via Carlo Pisacane, 9
25128 Brescia, Italy
Tel: +39 030 5237 163
Fax: +39 030 5033 293
info@net-italia.it
www.net-italia.it

NET France

a branch of NET New
Electronic Technology GmbH
Tel: +33 450 45 22 92
Fax: +49 8806 9234 77
info@net-france-sas.fr
www.net-france-sas.fr

NET USA, Inc.

3037 45th Street
Highland IN 46322, USA
Tel: +1 219 934 9042
Fax: +1 219 934 9047
info@net-usa-inc.com
www.net-usa-inc.com

NET Japan Co., Ltd.

2F Shin-Yokohama 214 Bldg.
2-14-2 Shin-Yokohama, Kohoku-ku,
Yokohama-shi, 222-0033, Japan
Tel: +81 45 478 1020
Fax: +81 45 476 2423
info@net-japan.com
www.net-japan.com

NET - We simplify complicated technologies by making them easier to use.

Our strengths are the close understanding of the industrial and medical image processing field and the in-depth application knowledge which we have acquired over many years. Camera technology, CCD and CMOS technology, FPGA programming, hardware and software design are our core skills which we can tap within the company. Our innovative portfolio is supplemented by a wide range of standard and customized lenses and light systems.